M202 User Manual

Statement

This is the manual of M202. Without the written permission from the manufacturer, any company or individual shall not copy or backup it in any form (electronic, mechanical, photocopying, recording or otherwise). This manual is only operating instructions for M202. If any result caused by using it on other equipment, the company does not assume any responsibility for it. If not quality problems of M202: such as equipment failure caused by user abuse or misuse, unauthorized disassembly, repair equipment yourself, not operate or maintain by the instructions, lose it, the repair will not be free. Other product names mentioned in this manual are in order to describe how to use M202, and their owners are still the original company.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions(1) The device may not cause harmful interference, and(2) this device must accept any interference received, including interference that may cause undesired operation.

Content

Chapter 1: Su	ımmary	1
1.1 Featur	res	1
1.1.1	Advantages	1
1.1.2	Durability	1
1.2 Introd	luction of the device	2
1.2.1	The introduction of the main unit	2
1.2.2	Introduction of accessories	3
1.3 Hardw	ware technical specification	4
1.4 Functi	ions setting	4
1.4.1	Functions selection	5
1.4.2	System setting	6
1.4.2.1	1 Language	6
1.4.2.2	2 Font	7
1.4.2.3	3 Metric/Inch	7
1.4.2.4	4 Data Logging	8
1.4.3	System Information	8
1.4.4	Device Self-test	9
1.4.4.1	1 Keyboard Test	9
Chapter 2: Ho	ow to register & Update software	10
2.1 Update	e Tool software installation	10
2.2 Registe	er	12
2.3 Softwa	re Update	13

Chapter1: Summary

1.1 Features

1.1.1 Advantages

- Providing multi-language environment so it can be used in different countries and regions.
- The main unit system uses ARM high-speed chip to keep it running fast, stable, and anti-jamming.
- Modern design and high-definition true color screen realize the integration of automotive industry and electronic information technologies and make auto key programming easier, practical and economical.

1.1.2 Durability

- Integrity structure design makes it crack resistance, shock resistance and durable.
- Industrial design ensures the tool work stably under tough environment, as high and low temperatures.


1.2 Introduction of the device

12.1 The introduction of the main unit



Number	Name	Instruction
1	Display Screen	Show information
2	Charging Interface	Connect with the charger
3	TF card slot	TF card storage
4	USB Interface	Connect with USB cable
(5)	Up	Up
6	F2	Keyboard input option key
7	F1	Keyboard input option key
8	Right	To right
9	Left	To left
10	Down	Down
(11)	ESC	Exit or give up
(12)	ОК	ОК
(13)	Testing cable port	Connect to the main test cable

1.2.2 Introduction of accessories



OBD 16 pin testing lead (Connect to car diagnostic socket)



(USB Cable)

1.3 Hardware technical specification

- Dimension: 202mm*106mm*31.6mm
- CPU: ARM CORTEX M3
- Power Supply:DC12V
- Operation Power:DC12V
- Operation Temperature: -10~60°C
- Display Screen: 320×240 TFT


1.4 Functions Setting

Power on, and then press ENTER on the screen, then enter VEHICLES, shown as below:


	_	
>VEHICLES		
OPTION		
ABOUT		
SELFTEST		
[ENT]	▼	[1/4]

1.4.1 Vehicles

Press OK to confirm, The diagram below.



Press OK to confirm the entry. The diagram below:



Note: the number and function of different product configuration software

will be different ,Please contact the dealer for confirmation of the number of software.

1.4.2 System Setting

Select system setting, you can set the language, font, metric/English system, data record, as shown below.

OP	TION
>LANGUAGE	
FONT	
METRIC/INCH	
DATA LOGGING	
[ENT] [ESC]	▼ [1/4]

1.4.2.1 Language selection

This device supports English. In the language directory, select required language by Up and Down and press OK to confirm it.

	LANGUAGE	
>English		
[ENT][ESC]	•	[1/1]


1.4.2.2 Font

Choose large or small fonts

	FONT	
>LARGE		
SMALL		
[ສາພງ [ສດດ]		[1 /o]
[ENT][ESC]		[1/2]

1.4.2.3 Metric/Inch

Optional metric or English system



1.4.2.4 Data Logging

Optional to close or open

	DATA LOGGING	
>OFF		
ON		
[ENT][ESC]	•	[1/2]

1.4.3 System Information

The system information includes the product serial number, the hardware version, the software version, release date, registration password.



1.4.4 Device Self-test

Liquid crystal self-check or keyboard self-check can be selected.

	SELFTEST	
>DISPLAY TEST		
KEYBOARD TEST		
[ENT] [ESC]		[1/2]

1.4.4.1 Keyboard self-inspection

The machine self-check includes LCD display, keyboard test, such as the lack of the display screen, keyboard malfunction, please send K100 to the manufacturer for maintenance

	KEYBOARD	TEST
	ESC	
F		
[ESC]		


Chapter 2: How to register & update software for K100

2.1 Install the update tool



2.2 Register

Step 1: Power on the device and you will see the following messages.



Step 2: Enter the Menu: About

VEHICLES	
OPTION	
>ABOUT	
SELFTEST	
[ENT]	[3/4]

Step 3: Get the S/N and the Register PASSWORD:



Step 4: enter Upgrade tool and start registeration:

Click "Sign up" to fill in user information. Username can be English characters or the combination of alphabet and numbers.

Serial number and register password can be referred to System information in the device.

Upgrade Tools Ver1.1	
Username	Sign Up
Password	Forgot persword
End User 🗸 🗸	
Remember password	
Log in	More

User Regsiter		x
Product serial number:	819400000400	*
Register password:	12729317	*
Distributor code:	00864002	*
Vser name:	obdxny	*
Your password:	****	*
Password:	*****] *
Email:	xjgyelghao@gmail.com	*
Contacts:]
Company name:		
Contact phone number:]
Contact address:		
	Submit]

2.3 Software Updating


Operation steps as following:

Step1: Connect device to computer via usb and make sure memory cord can be detected normally.

Step 2: Open one key update tool and login.

Step 3: Click single software or select all to update.

(Note:It's better to click "Format memory card"while updating) Step 4: Wait for several minutes until the updating finished.

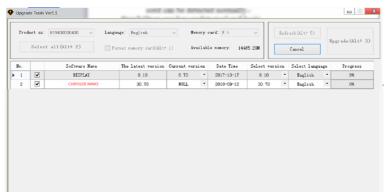

é